


GEOTECHNICAL ENGINEERING REPORT

NSCP 2015 7TH EDITION; ASTM D6951/D6951M; ASTM D3441

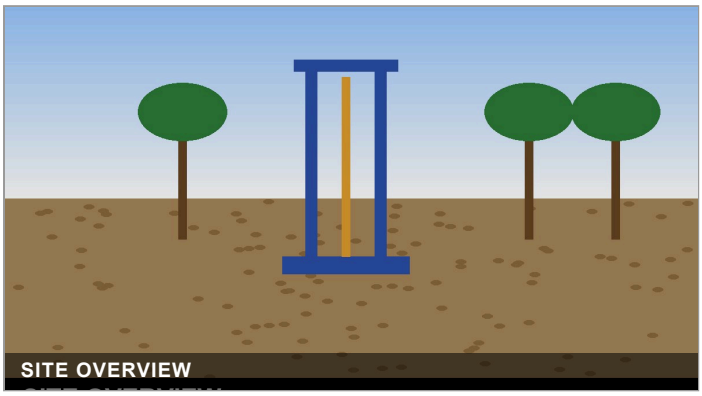

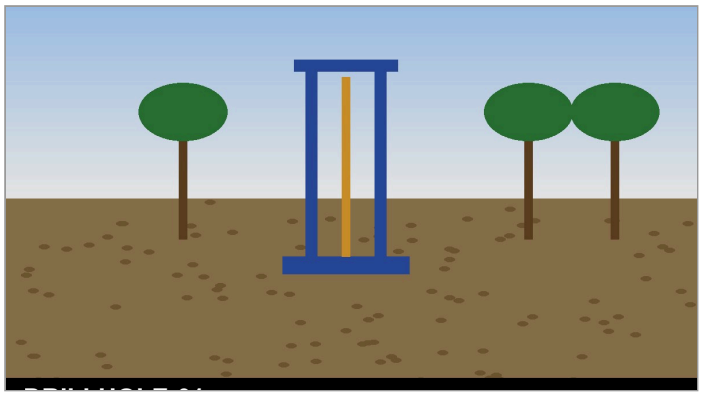

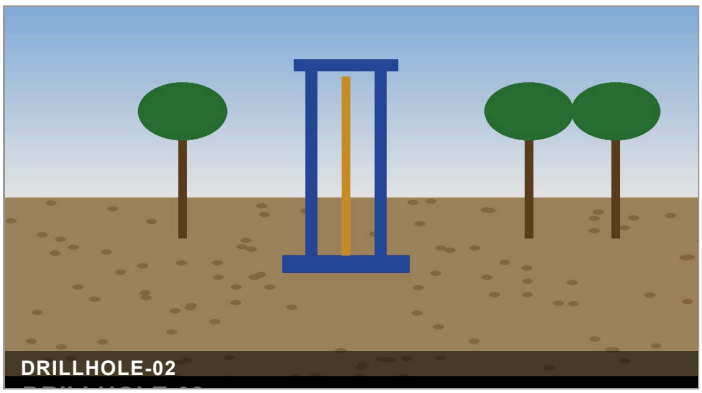

PROJECT TITLE :

PROPOSED THREE (3) STOREY COMMERCIAL BUILDING

SITE LOCATION : **SAMPLE BARANGAY, SAMPLE CITY, PALAWAN**
PROJECT OWNER : **SAMPLE CLIENT CORPORATION**
REFERENCE NO. : **DEMO-2026-001**
REPORT DATE : **05 OCTOBER 2026**

SAMPLE CLIENT CORPORATION
CLIENT

SAMPLE GEOTECHNICAL TESTING SERVICES
VENDOR

GEOTECHNICAL ENGINEERING REPORT

PROJECT TITLE :	**PROPOSED THREE (3) STOREY COMMERCIAL BUILDING**		
LOCATION :	**SAMPLE BARANGAY, SAMPLE CITY, PALAWAN**		
CLIENT :	**SAMPLE CLIENT CORPORATION**	REPORT DATE :	**05 OCTOBER 2026**
REFERENCE :	**DEMO-2026-001**	DATE TESTED :	**03 OCTOBER 2026**

PROJECT SUMMARY

Project title	Proposed Three (3) Storey Commercial Building
Client / project owner	Sample Client Corporation
Site location	Sample Barangay, Sample City, Palawan
Reference no.	DEMO-2026-001
Date tested	03 OCTOBER 2026
Report date	05 OCTOBER 2026
Weather	Fair / Sunny
Engineer in charge	—
Prepared by	—
Reviewed by	—
Technical references	NSCP 2015 7th Edition; ASTM D6951/D6951M; ASTM D3441

DRILLHOLE SUMMARY

Drillhole	Date tested	Depths tested	Max depth (m)	Depths with ASBC	Min ASBC (kPa) @ depth	Max ASBC (kPa)
DH-01	03 OCTOBER 2026	11	10.0	9 of 11	144.30 @ Near NGL	504.20
DH-02	03 OCTOBER 2026	0	—	0 of 0	—	—

CALCULATION METHOD

Ref.	Quantity	Expression	Status
F-01	Dynamic impact load	I = M × (27 × H)^0.5 ; I = M when H = 0	**Engineer approved**
F-02	Incremental settlement per drop	s(i) = R(i−1) − R(i), readings taken in the order A1, A2, A3, B1, B2, B3, C1, C2, C3; R(0) = initial reading	**Engineer approved**
F-03	Load conversion to force	P = round(I, 1) × 0.01	**Engineer approved**
F-04	Ultimate soil bearing capacity (USBC)	USBC = P / (π × d² / 4)	**Engineer approved**
F-05	Allowable soil bearing capacity (ASBC)	ASBC = USBC / SF	**Engineer approved**
F-06	Critical load at critical settlement	Critical load determined by the engineer for each depth from the load–settlement data (recorded with name, basis and time)	**Engineer approved**
F-07	Consistency / rock-strength classification from ASBC	Consistency and rock-strength class assigned by the engineer in the soil profile	**Engineer approved**

METHOD YAZE-ADCPT 1.0 SIGNED BY ENGR. SAMPLE ENGINEER (PRC 0000000) ON 09 OCTOBER 2026.

Methodology DH-01: YAZE-ADCPT 1.0 · DH-02: YAZE-ADCPT 1.0. Snapshot taken 10/10/2026, 00:09:08.

ADVANCED DYNAMIC CONE PENETRATION TEST REPORT

PROJECT TITLE :	**PROPOSED THREE (3) STOREY COMMERCIAL BUILDING**		
LOCATION :	**SAMPLE BARANGAY, SAMPLE CITY, PALAWAN**		
TEST NO. :	**DRILLHOLE - 01 (DH-01)**	DATE TESTED :	**03 OCTOBER 2026**
WEATHER :	**FAIR / SUNNY**	TIME TESTED :	**9:00 AM**

SOIL BEARING STRENGTH IN-SITU RESULTS

DEPTH (m)	TEST (No.)	DYNAMIC LOAD (kg)	(kN)	DRILL BIT (Ø m)	USBC (kPa)	SF	ASBC (kPa)	SETTLEMENT A / B / C (mm)	CLASSIFICATION
NGL	1	85.4	0.854	0.05	434.94	3.0	144.98	25 / 18 / 8	Stiff to very stiff clay, Lean clay, yellowish-brown to creamy-yellowish white (CL)
	2	110.2	1.102	0.05	561.24	3.0	187.08	-5 / 22 / 19	
	3	130.4	1.304	0.05	664.12	3.0	221.37	85 / 27 / 31	
	CRIT.	**85.0**	**0.850**	0.05	**432.90**	3.0	**144.30**	**25**	
1	1	85.4	0.854	0.05	434.94	3.0	144.98	16 / 11 / 9	Stiff to very stiff clay, Lean clay, yellowish-brown to creamy-yellowish white (CL)
	2	110.2	1.102	0.05	561.24	3.0	187.08	24 / 20 / 16	
	3	155.9	1.559	0.05	793.99	3.0	264.66	39 / 35 / 25	
	CRIT.	**Critical load not entered — Requires Engineer Verification**							
2	1	85.4	0.854	0.05	434.94	3.0	144.98	8 / 3 / 5	Stiff to very stiff clay, Lean clay, yellowish-brown to creamy-yellowish white (CL)
	2	110.2	1.102	0.05	561.24	3.0	187.08	10 / 10 / 10	
	3	155.9	1.559	0.05	793.99	3.0	264.66	19 / 15 / 17	
	CRIT.	**180.0**	**1.800**	0.05	**916.73**	3.0	**305.58**	**25**	
3	1	85.4	0.854	0.05	434.94	3.0	144.98	1 / 5 / 7	Stiff to very stiff clay, Lean clay, yellowish-brown to creamy-yellowish white (CL)
	2	110.2	1.102	0.05	561.24	3.0	187.08	4 / 10 / 16	
	3	155.9	1.559	0.05	793.99	3.0	264.66	25 / 20 / 21	
	CRIT.	**155.0**	**1.550**	0.05	**789.41**	3.0	**263.14**	**25**	
4	1	85.4	0.854	0.05	434.94	3.0	144.98	3 / 6 / 5	Stiff to very stiff clay, Lean clay, yellowish-brown to creamy-yellowish white (CL)
	2	110.2	1.102	0.05	561.24	3.0	187.08	7 / 10 / 10	
	3	155.9	1.559	0.05	793.99	3.0	264.66	19 / 15 / 20	
	CRIT.	**176.0**	**1.760**	0.05	**896.36**	3.0	**298.79**	**25**	
5	1	85.4	0.854	0.05	434.94	3.0	144.98	4 / 5 / 3	Stiff to very stiff clay, Lean clay, yellowish-brown to creamy-yellowish white (CL)
	2	110.2	1.102	0.05	561.24	3.0	187.08	6 / 10 / 12	
	3	155.9	1.559	0.05	793.99	3.0	264.66	20 / 15 / 20	
	CRIT.	**168.0**	**1.680**	0.05	**855.62**	3.0	**285.21**	**25**	
6	1	85.4	0.854	0.05	434.94	3.0	144.98	5 / 5 / 3	Stiff to very stiff clay, Lean clay, yellowish-brown to creamy-yellowish white (CL)
	2	110.2	1.102	0.05	561.24	3.0	187.08	10 / 10 / 6	
	3	155.9	1.559	0.05	793.99	3.0	264.66	20 / 21 / 15	
	CRIT.	**172.0**	**1.720**	0.05	**875.99**	3.0	**292.00**	**25**	
7	1	85.4	0.854	0.05	434.94	3.0	144.98	4 / 3 / 3	Stiff to very stiff clay, Lean clay, yellowish-brown to creamy-yellowish white (CL)
	2	110.2	1.102	0.05	561.24	3.0	187.08	7 / 5 / 5	
	3	155.9	1.559	0.05	793.99	3.0	264.66	14 / 10 / 11	
	CRIT.	**Critical load not entered — Requires Engineer Verification**							
8	1	85.4	0.854	0.05	434.94	3.0	144.98	4 / 3 / 3	Stiff to very stiff clay, Lean clay, yellowish-brown to creamy-yellowish white (CL)
	2	110.2	1.102	0.05	561.24	3.0	187.08	6 / 5 / 7	
	3	155.9	1.559	0.05	793.99	3.0	264.66	12 / 11 / 12	
	CRIT.	**220.0**	**2.200**	0.05	**1,120.45**	3.0	**373.48**	**25**	

ADVANCED DYNAMIC CONE PENETRATION TEST REPORT

PROJECT TITLE :	**PROPOSED THREE (3) STOREY COMMERCIAL BUILDING**		
LOCATION :	**SAMPLE BARANGAY, SAMPLE CITY, PALAWAN**		
TEST NO. :	**DRILLHOLE - 01 (DH-01)**	DATE TESTED :	**03 OCTOBER 2026**
WEATHER :	**FAIR / SUNNY**	TIME TESTED :	**9:00 AM**

SOIL BEARING STRENGTH IN-SITU RESULTS (CONTINUED)

DEPTH (m)	TEST (No.)	DYNAMIC LOAD (kg)	(kN)	DRILL BIT (Ø m)	USBC (kPa)	SF	ASBC (kPa)	SETTLEMENT A / B / C (mm)	CLASSIFICATION
9	1	85.4	0.854	0.05	434.94	3.0	144.98	3 / 2 / 3	Extremely weak rock, Lithified clay (R0) — soft shale / claystone
	2	110.2	1.102	0.05	561.24	3.0	187.08	5 / 4 / 5	
	3	155.9	1.559	0.05	793.99	3.0	264.66	10 / 9 / 9	
	CRIT.	**240.0**	**2.400**	0.05	**1,222.31**	3.0	**407.44**	**25**	
10	1	85.4	0.854	0.05	434.94	3.0	144.98	2 / 2 / 3	Extremely weak rock, Lithified clay (R0) — soft shale / claystone
	2	110.2	1.102	0.05	561.24	3.0	187.08	5 / 4 / 5	
	3	155.9	1.559	0.05	793.99	3.0	264.66	8 / 8 / 7	
	CRIT.	**297.0**	**2.970**	0.05	**1,512.61**	3.0	**504.20**	**25**	

INCOMPLETE: 2 of 11 depth(s) have no critical load — ASBC not reported for those depths.

NOTATIONS: USBC — ultimate soil bearing capacity; ASBC — allowable soil bearing capacity (USBC / SF); SF — safety factor; NGL — natural ground level; CRIT. — load at the critical settlement of 25 mm. Rows 1… are the drops of the dynamic cone test; settlement per test A / B / C.

Method: YAZE-ADCPT 1.0, approved by Engr. Sample Engineer (PRC 0000000) on 09 OCTOBER 2026. Critical loads are the engineer's determination per depth; ASBC = USBC / SF.

ADVANCED DYNAMIC CONE PENETRATION TEST (ADCPT)

PROJECT TITLE :	**PROPOSED THREE (3) STOREY COMMERCIAL BUILDING**		
LOCATION :	**SAMPLE BARANGAY, SAMPLE CITY, PALAWAN**		
TEST NO. :	**DRILLHOLE - 01 (DH-01)**	DATE TESTED :	**03 OCTOBER 2026**
WEATHER :	**FAIR / SUNNY**	TIME TESTED :	**9:00 AM**

DYNAMIC LOADS – SETTLEMENTS ANALYSIS

DRILLHOLE DEPTH: Near NGL **UNIFIED SOIL CLASSIFICATION (USCS):** Lean clay, yellowish-brown to creamy-yellowish white (CL)

DROP h (mm)	DH MASS (kg)	PENETRATION READING (mm)			IMPACT LOAD (kg)	SETTLEMENT (mm)		
		TEST A	TEST B	TEST C		TEST A	TEST B	TEST C
0	30	500			30	0	0	0
300	30	475	377	320	85.38	−25	−18	−8
500	30	480	355	301	110.23	−-5	−22	−19
700	30	395	328	270	130.42	−85	−27	−31
CRITICAL LOAD @ CRITICAL SETTLEMENT					**85.00**	**−25**		

DYNAMIC LOADS – SETTLEMENTS CURVE



Method: YAZE-ADCPT 1.0, approved by Engr. Sample Engineer (PRC 0000000) on 09 OCTOBER 2026. Critical loads are the engineer's determination per depth; ASBC = USBC / SF.

ADVANCED DYNAMIC CONE PENETRATION TEST (ADCPT)


PROJECT TITLE :	**PROPOSED THREE (3) STOREY COMMERCIAL BUILDING**		
LOCATION :	**SAMPLE BARANGAY, SAMPLE CITY, PALAWAN**		
TEST NO. :	**DRILLHOLE - 01 (DH-01)**	DATE TESTED :	**03 OCTOBER 2026**
WEATHER :	**FAIR / SUNNY**	TIME TESTED :	**9:00 AM**

DYNAMIC LOADS – SETTLEMENTS ANALYSIS

DRILLHOLE DEPTH: 1 m **UNIFIED SOIL CLASSIFICATION (USCS):** Lean clay, yellowish-brown to creamy-yellowish white (CL)

DROP h (mm)	DH MASS (kg)	PENETRATION READING (mm)			IMPACT LOAD (kg)	SETTLEMENT (mm)		
		TEST A	TEST B	TEST C		TEST A	TEST B	TEST C
0	30	500			30	0	0	0
300	30	484	410	346	85.38	−16	−11	−9
500	30	460	390	330	110.23	−24	−20	−16
1000	30	421	355	305	155.88	−39	−35	−25
CRITICAL LOAD @ CRITICAL SETTLEMENT					**Not entered — Requires Engineer Verification**			

DYNAMIC LOADS – SETTLEMENTS CURVE

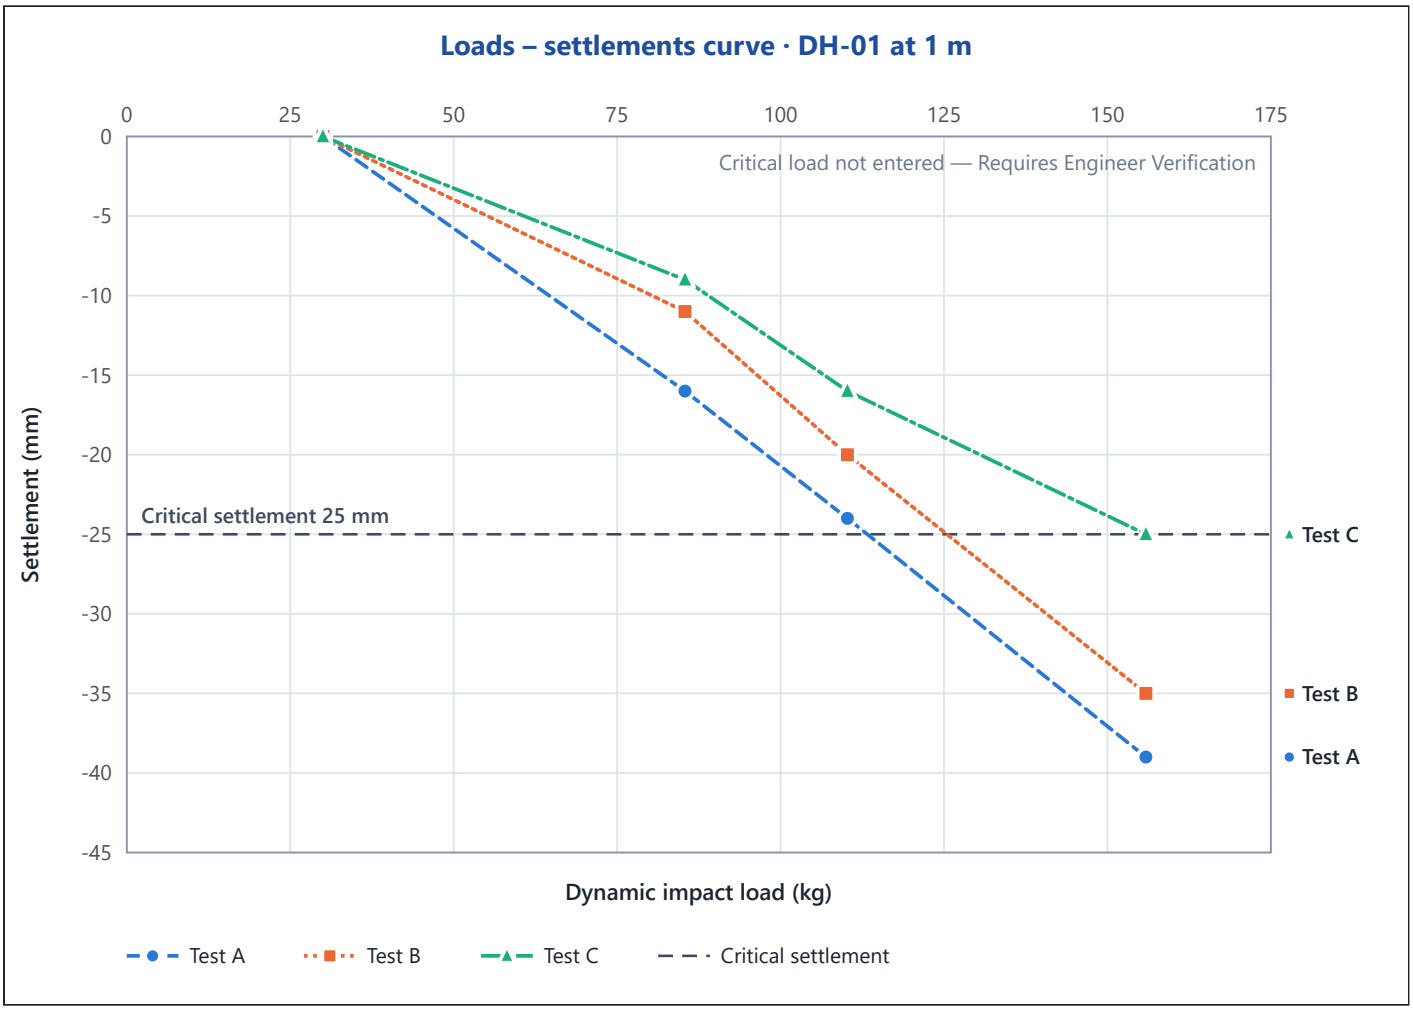

Method: YAZE-ADCPT 1.0, approved by Engr. Sample Engineer (PRC 0000000) on 09 OCTOBER 2026. Critical loads are the engineer's determination per depth; ASBC = USBC / SF.

ADVANCED DYNAMIC CONE PENETRATION TEST (ADCPT)


PROJECT TITLE :	**PROPOSED THREE (3) STOREY COMMERCIAL BUILDING**		
LOCATION :	**SAMPLE BARANGAY, SAMPLE CITY, PALAWAN**		
TEST NO. :	**DRILLHOLE - 01 (DH-01)**	DATE TESTED :	**03 OCTOBER 2026**
WEATHER :	**FAIR / SUNNY**	TIME TESTED :	**9:00 AM**

DYNAMIC LOADS – SETTLEMENTS ANALYSIS

DRILLHOLE DEPTH: 2 m **UNIFIED SOIL CLASSIFICATION (USCS):** Lean clay, yellowish-brown to creamy-yellowish white (CL)

DROP h (mm)	DH MASS (kg)	PENETRATION READING (mm)			IMPACT LOAD (kg)	SETTLEMENT (mm)		
		TEST A	TEST B	TEST C		TEST A	TEST B	TEST C
0	30	500			30	0	0	0
300	30	492	460	430	85.38	−8	−3	−5
500	30	482	450	420	110.23	−10	−10	−10
1000	30	463	435	403	155.88	−19	−15	−17
CRITICAL LOAD @ CRITICAL SETTLEMENT					**180.00**	**−25**		

DYNAMIC LOADS – SETTLEMENTS CURVE

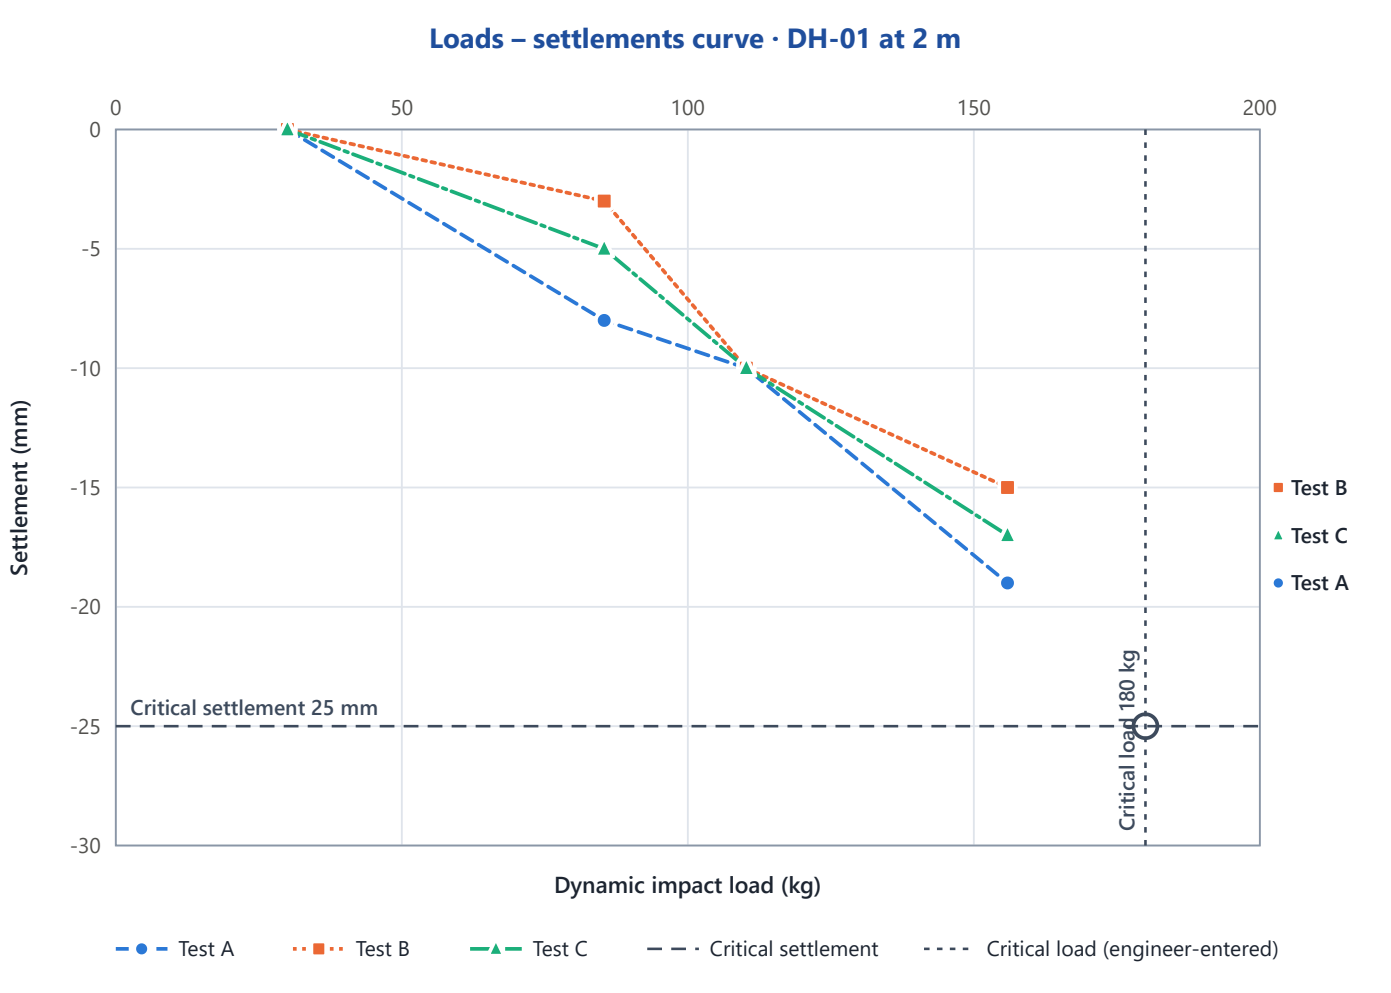

Method: YAZE-ADCPT 1.0, approved by Engr. Sample Engineer (PRC 0000000) on 09 OCTOBER 2026. Critical loads are the engineer's determination per depth; ASBC = USBC / SF.

ADVANCED DYNAMIC CONE PENETRATION TEST (ADCPT)


PROJECT TITLE :	**PROPOSED THREE (3) STOREY COMMERCIAL BUILDING**		
LOCATION :	**SAMPLE BARANGAY, SAMPLE CITY, PALAWAN**		
TEST NO. :	**DRILLHOLE - 01 (DH-01)**	DATE TESTED :	**03 OCTOBER 2026**
WEATHER :	**FAIR / SUNNY**	TIME TESTED :	**9:00 AM**

DYNAMIC LOADS – SETTLEMENTS ANALYSIS

DRILLHOLE DEPTH: 3 m **UNIFIED SOIL CLASSIFICATION (USCS):** Lean clay, yellowish-brown to creamy-yellowish white (CL)

DROP h (mm)	DH MASS (kg)	PENETRATION READING (mm)			IMPACT LOAD (kg)	SETTLEMENT (mm)		
		TEST A	TEST B	TEST C		TEST A	TEST B	TEST C
0	30	500			30	0	0	0
300	30	499	465	428	85.38	−1	−5	−7
500	30	495	455	412	110.23	−4	−10	−16
1000	30	470	435	391	155.88	−25	−20	−21
CRITICAL LOAD @ CRITICAL SETTLEMENT					**155.00**	**−25**		

DYNAMIC LOADS – SETTLEMENTS CURVE

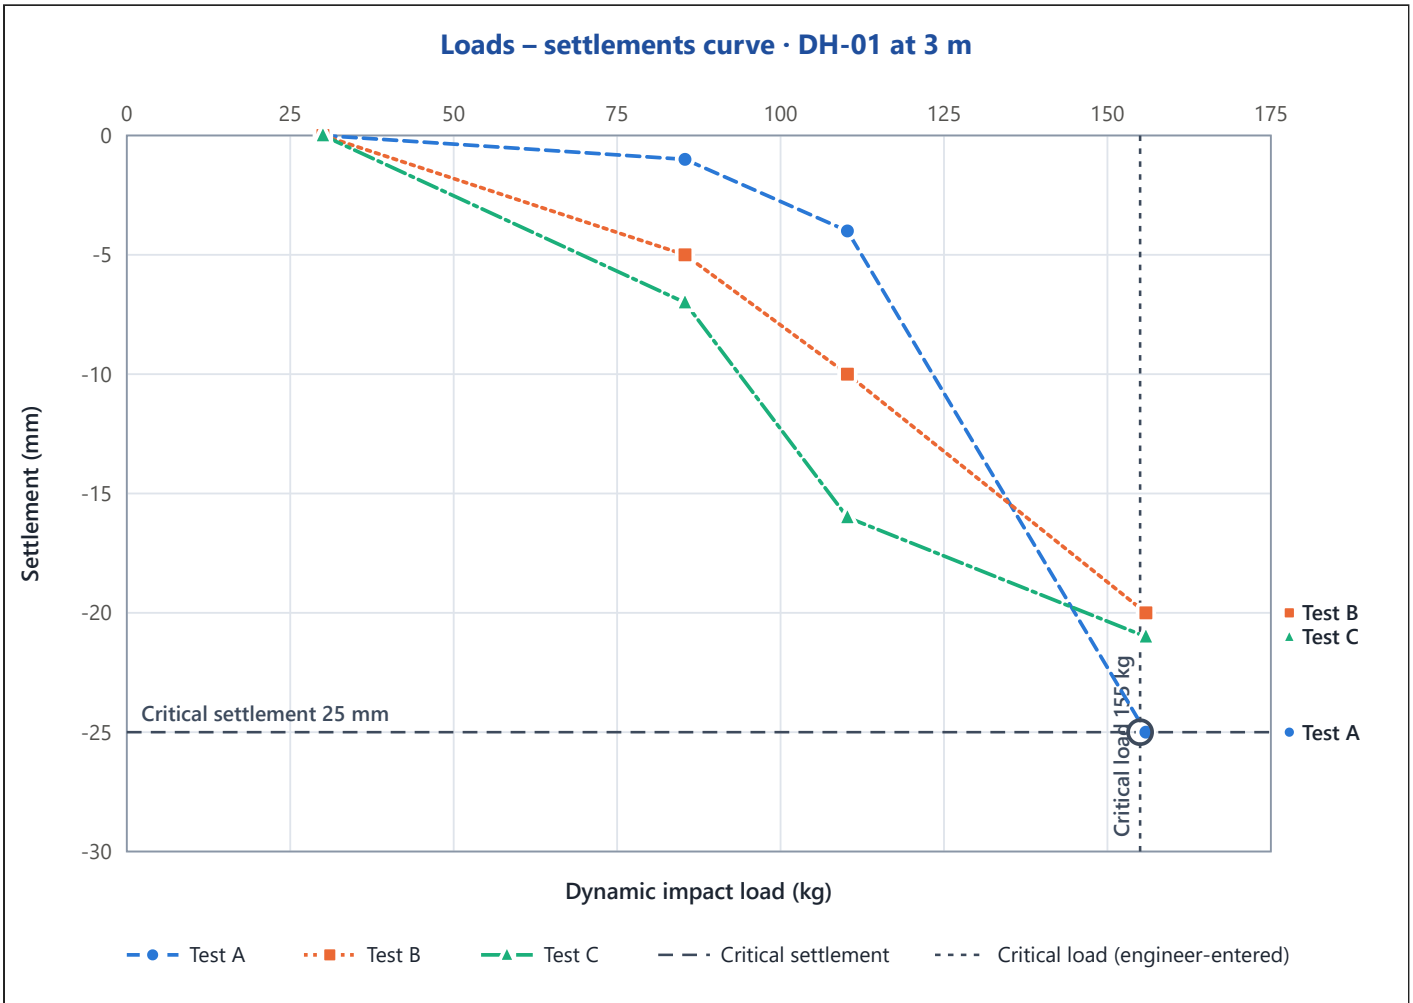

Method: YAZE-ADCPT 1.0, approved by Engr. Sample Engineer (PRC 0000000) on 09 OCTOBER 2026. Critical loads are the engineer's determination per depth; ASBC = USBC / SF.

ADVANCED DYNAMIC CONE PENETRATION TEST (ADCPT)


PROJECT TITLE :	**PROPOSED THREE (3) STOREY COMMERCIAL BUILDING**		
LOCATION :	**SAMPLE BARANGAY, SAMPLE CITY, PALAWAN**		
TEST NO. :	**DRILLHOLE - 01 (DH-01)**	DATE TESTED :	**03 OCTOBER 2026**
WEATHER :	**FAIR / SUNNY**	TIME TESTED :	**9:00 AM**

DYNAMIC LOADS – SETTLEMENTS ANALYSIS

DRILLHOLE DEPTH: 4 m **UNIFIED SOIL CLASSIFICATION (USCS):** Lean clay, yellowish-brown to creamy-yellowish white (CL)

DROP h (mm)	DH MASS (kg)	PENETRATION READING (mm)			IMPACT LOAD (kg)	SETTLEMENT (mm)		
		TEST A	TEST B	TEST C		TEST A	TEST B	TEST C
0	30	500			30	0	0	0
300	30	497	465	435	85.38	−3	−6	−5
500	30	490	455	425	110.23	−7	−10	−10
1000	30	471	440	405	155.88	−19	−15	−20
CRITICAL LOAD @ CRITICAL SETTLEMENT					**176.00**	**−25**		

DYNAMIC LOADS – SETTLEMENTS CURVE

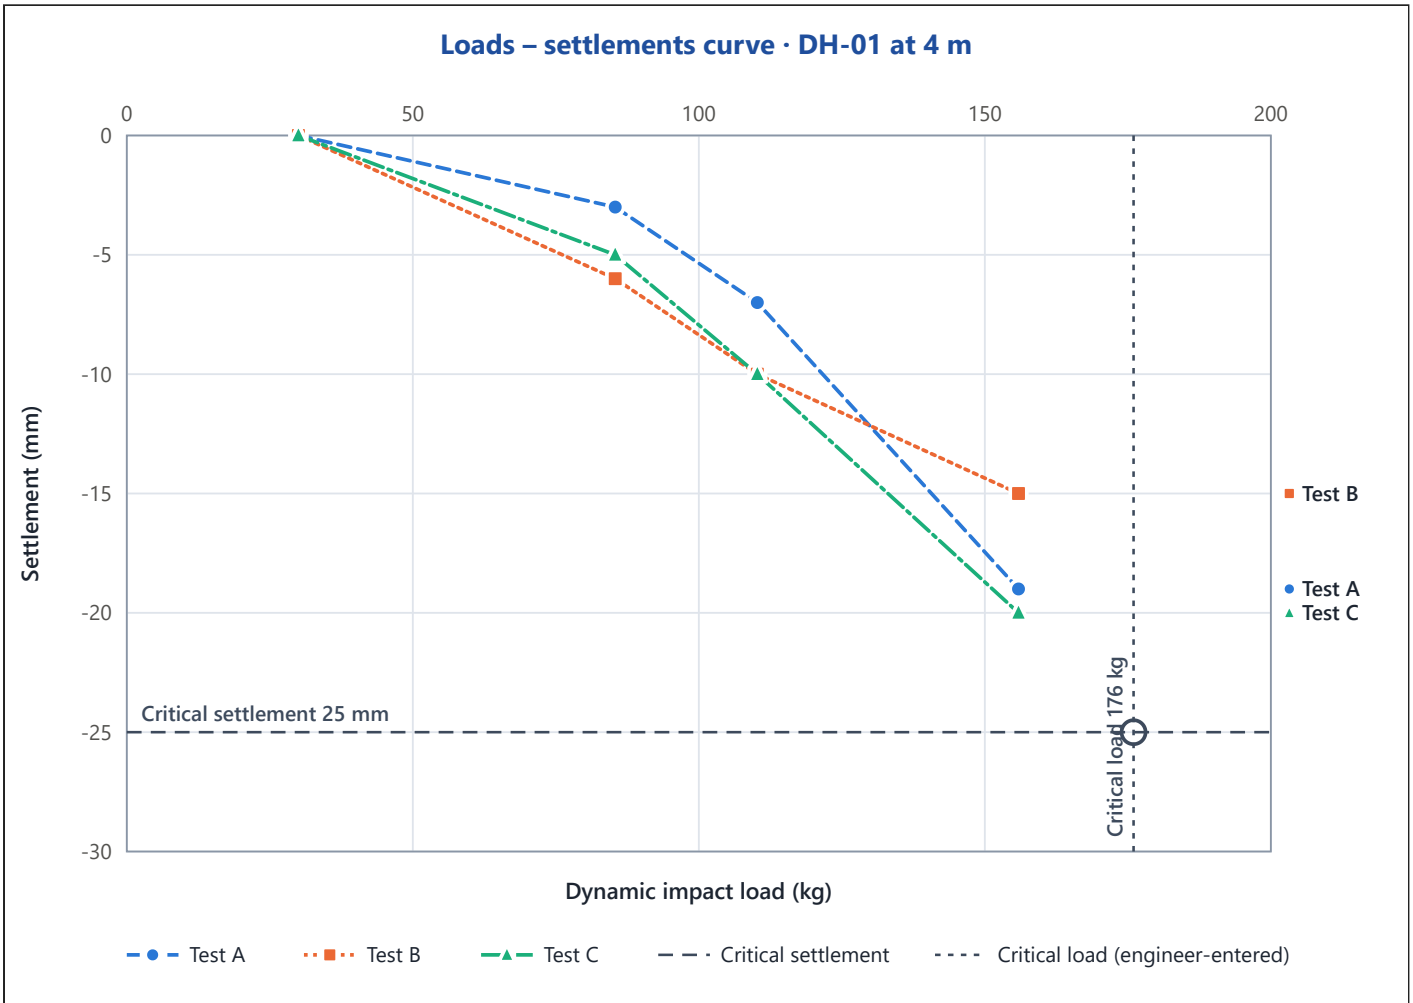

Method: YAZE-ADCPT 1.0, approved by Engr. Sample Engineer (PRC 0000000) on 09 OCTOBER 2026. Critical loads are the engineer's determination per depth; ASBC = USBC / SF.

ADVANCED DYNAMIC CONE PENETRATION TEST (ADCPT)


PROJECT TITLE :	**PROPOSED THREE (3) STOREY COMMERCIAL BUILDING**		
LOCATION :	**SAMPLE BARANGAY, SAMPLE CITY, PALAWAN**		
TEST NO. :	**DRILLHOLE - 01 (DH-01)**	DATE TESTED :	**03 OCTOBER 2026**
WEATHER :	**FAIR / SUNNY**	TIME TESTED :	**9:00 AM**

DYNAMIC LOADS – SETTLEMENTS ANALYSIS

DRILLHOLE DEPTH: 5 m **UNIFIED SOIL CLASSIFICATION (USCS):** Lean clay, yellowish-brown to creamy-yellowish white (CL)

DROP h (mm)	DH MASS (kg)	PENETRATION READING (mm)			IMPACT LOAD (kg)	SETTLEMENT (mm)		
		TEST A	TEST B	TEST C		TEST A	TEST B	TEST C
0	30	500			30	0	0	0
300	30	496	465	437	85.38	−4	−5	−3
500	30	490	455	425	110.23	−6	−10	−12
1000	30	470	440	405	155.88	−20	−15	−20
CRITICAL LOAD @ CRITICAL SETTLEMENT					**168.00**	**−25**		

DYNAMIC LOADS – SETTLEMENTS CURVE

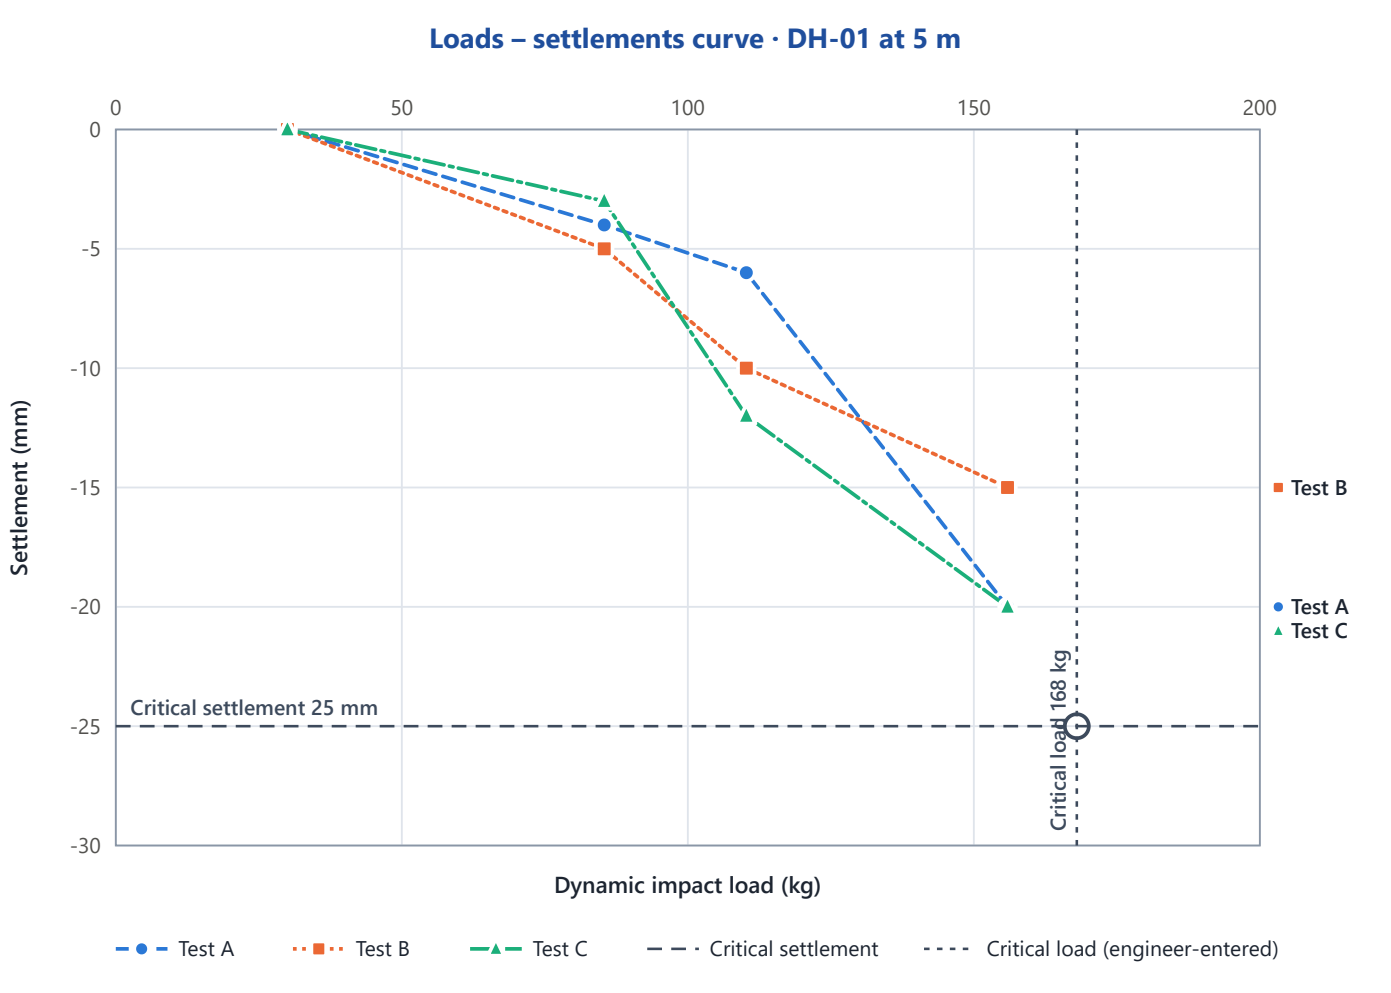

Method: YAZE-ADCPT 1.0, approved by Engr. Sample Engineer (PRC 0000000) on 09 OCTOBER 2026. Critical loads are the engineer's determination per depth; ASBC = USBC / SF.

ADVANCED DYNAMIC CONE PENETRATION TEST (ADCPT)


PROJECT TITLE :	**PROPOSED THREE (3) STOREY COMMERCIAL BUILDING**		
LOCATION :	**SAMPLE BARANGAY, SAMPLE CITY, PALAWAN**		
TEST NO. :	**DRILLHOLE - 01 (DH-01)**	DATE TESTED :	**03 OCTOBER 2026**
WEATHER :	**FAIR / SUNNY**	TIME TESTED :	**9:00 AM**

DYNAMIC LOADS – SETTLEMENTS ANALYSIS

DRILLHOLE DEPTH: 6 m **UNIFIED SOIL CLASSIFICATION (USCS):** Lean clay, yellowish-brown to creamy-yellowish white (CL)

DROP h (mm)	DH MASS (kg)	PENETRATION READING (mm)			IMPACT LOAD (kg)	SETTLEMENT (mm)		
		TEST A	TEST B	TEST C		TEST A	TEST B	TEST C
0	30	500			30	0	0	0
300	30	495	460	426	85.38	−5	−5	−3
500	30	485	450	420	110.23	−10	−10	−6
1000	30	465	429	405	155.88	−20	−21	−15
CRITICAL LOAD @ CRITICAL SETTLEMENT					**172.00**	**−25**		

DYNAMIC LOADS – SETTLEMENTS CURVE

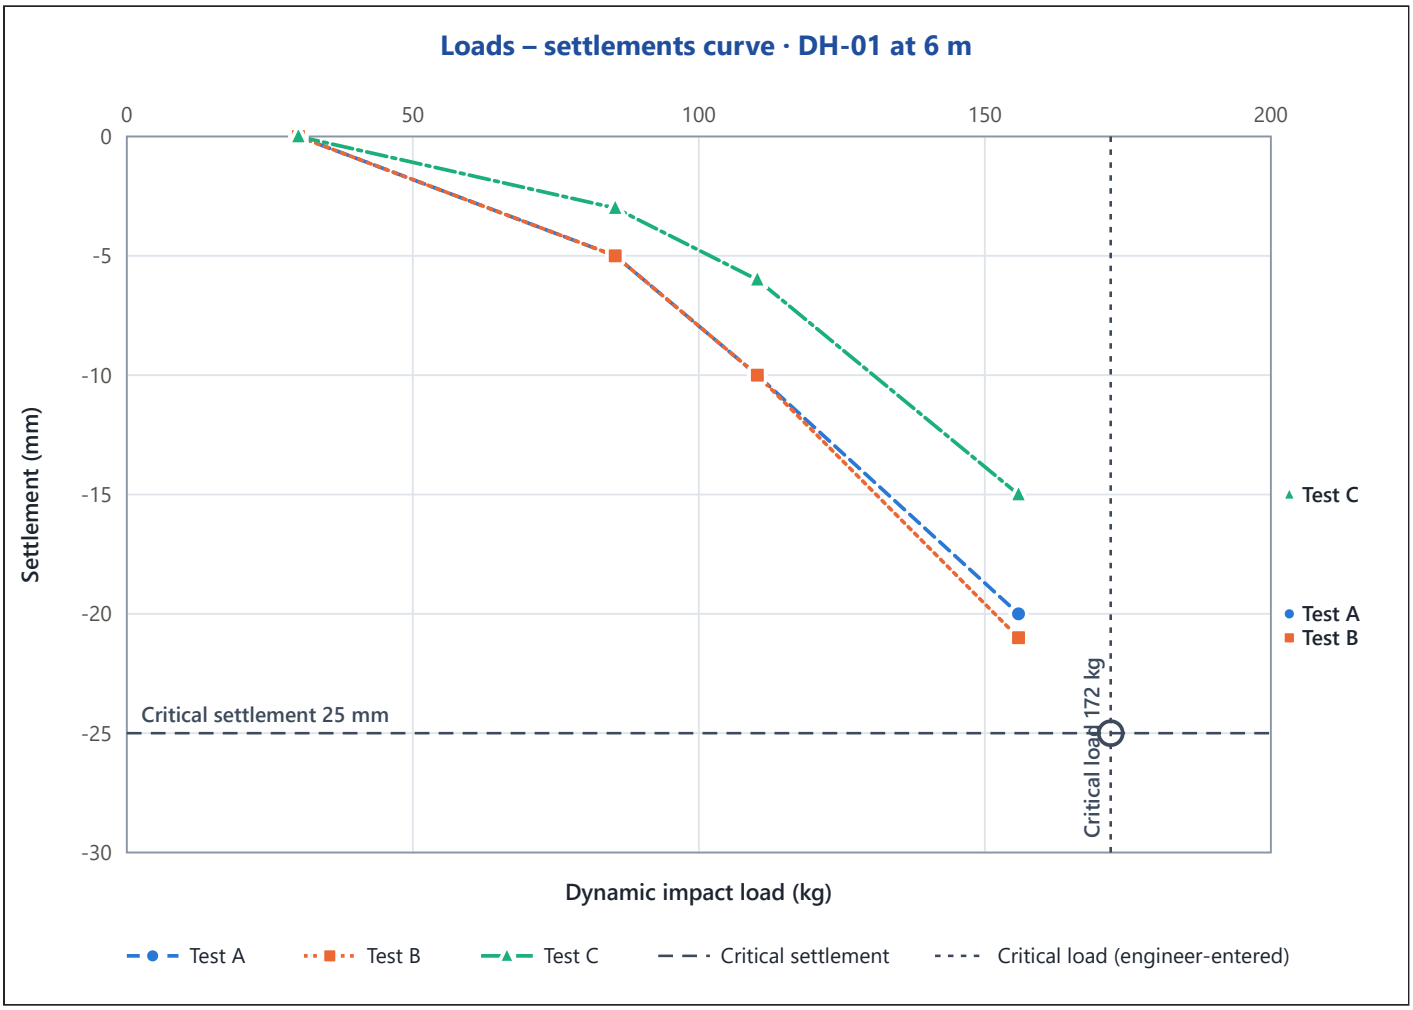

Method: YAZE-ADCPT 1.0, approved by Engr. Sample Engineer (PRC 0000000) on 09 OCTOBER 2026. Critical loads are the engineer's determination per depth; ASBC = USBC / SF.

ADVANCED DYNAMIC CONE PENETRATION TEST (ADCPT)


PROJECT TITLE :	**PROPOSED THREE (3) STOREY COMMERCIAL BUILDING**		
LOCATION :	**SAMPLE BARANGAY, SAMPLE CITY, PALAWAN**		
TEST NO. :	**DRILLHOLE - 01 (DH-01)**	DATE TESTED :	**03 OCTOBER 2026**
WEATHER :	**FAIR / SUNNY**	TIME TESTED :	**9:00 AM**

DYNAMIC LOADS – SETTLEMENTS ANALYSIS

DRILLHOLE DEPTH: 7 m **UNIFIED SOIL CLASSIFICATION (USCS):** Lean clay, yellowish-brown to creamy-yellowish white (CL)

DROP h (mm)	DH MASS (kg)	PENETRATION READING (mm)			IMPACT LOAD (kg)	SETTLEMENT (mm)		
		TEST A	TEST B	TEST C		TEST A	TEST B	TEST C
0	30	500			30	0	0	0
300	30	496	472	454	85.38	−4	−3	−3
500	30	489	467	449	110.23	−7	−5	−5
1000	30	475	457	438	155.88	−14	−10	−11
CRITICAL LOAD @ CRITICAL SETTLEMENT					**Not entered — Requires Engineer Verification**			

DYNAMIC LOADS – SETTLEMENTS CURVE

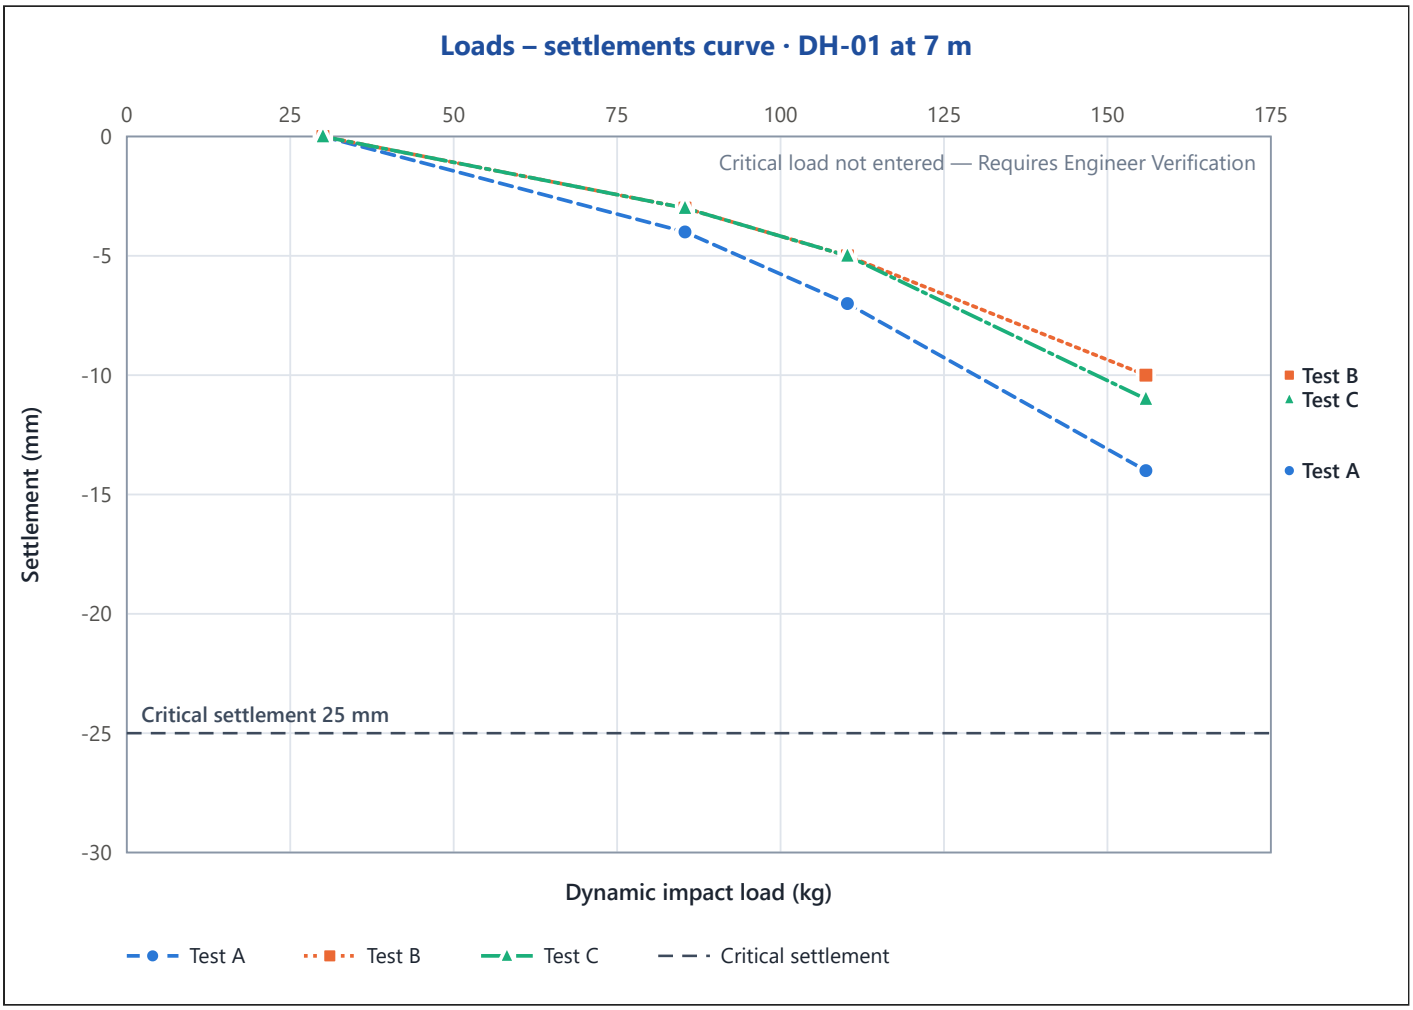

Method: YAZE-ADCPT 1.0, approved by Engr. Sample Engineer (PRC 0000000) on 09 OCTOBER 2026. Critical loads are the engineer's determination per depth; ASBC = USBC / SF.

ADVANCED DYNAMIC CONE PENETRATION TEST (ADCPT)


PROJECT TITLE :	**PROPOSED THREE (3) STOREY COMMERCIAL BUILDING**		
LOCATION :	**SAMPLE BARANGAY, SAMPLE CITY, PALAWAN**		
TEST NO. :	**DRILLHOLE - 01 (DH-01)**	DATE TESTED :	**03 OCTOBER 2026**
WEATHER :	**FAIR / SUNNY**	TIME TESTED :	**9:00 AM**

DYNAMIC LOADS – SETTLEMENTS ANALYSIS

DRILLHOLE DEPTH: 8 m **UNIFIED SOIL CLASSIFICATION (USCS):** Lean clay, yellowish-brown to creamy-yellowish white (CL)

DROP h (mm)	DH MASS (kg)	PENETRATION READING (mm)			IMPACT LOAD (kg)	SETTLEMENT (mm)		
		TEST A	TEST B	TEST C		TEST A	TEST B	TEST C
0	30	500			30	0	0	0
300	30	496	475	456	85.38	−4	−3	−3
500	30	490	470	449	110.23	−6	−5	−7
1000	30	478	459	437	155.88	−12	−11	−12
CRITICAL LOAD @ CRITICAL SETTLEMENT					**220.00**	**−25**		

DYNAMIC LOADS – SETTLEMENTS CURVE

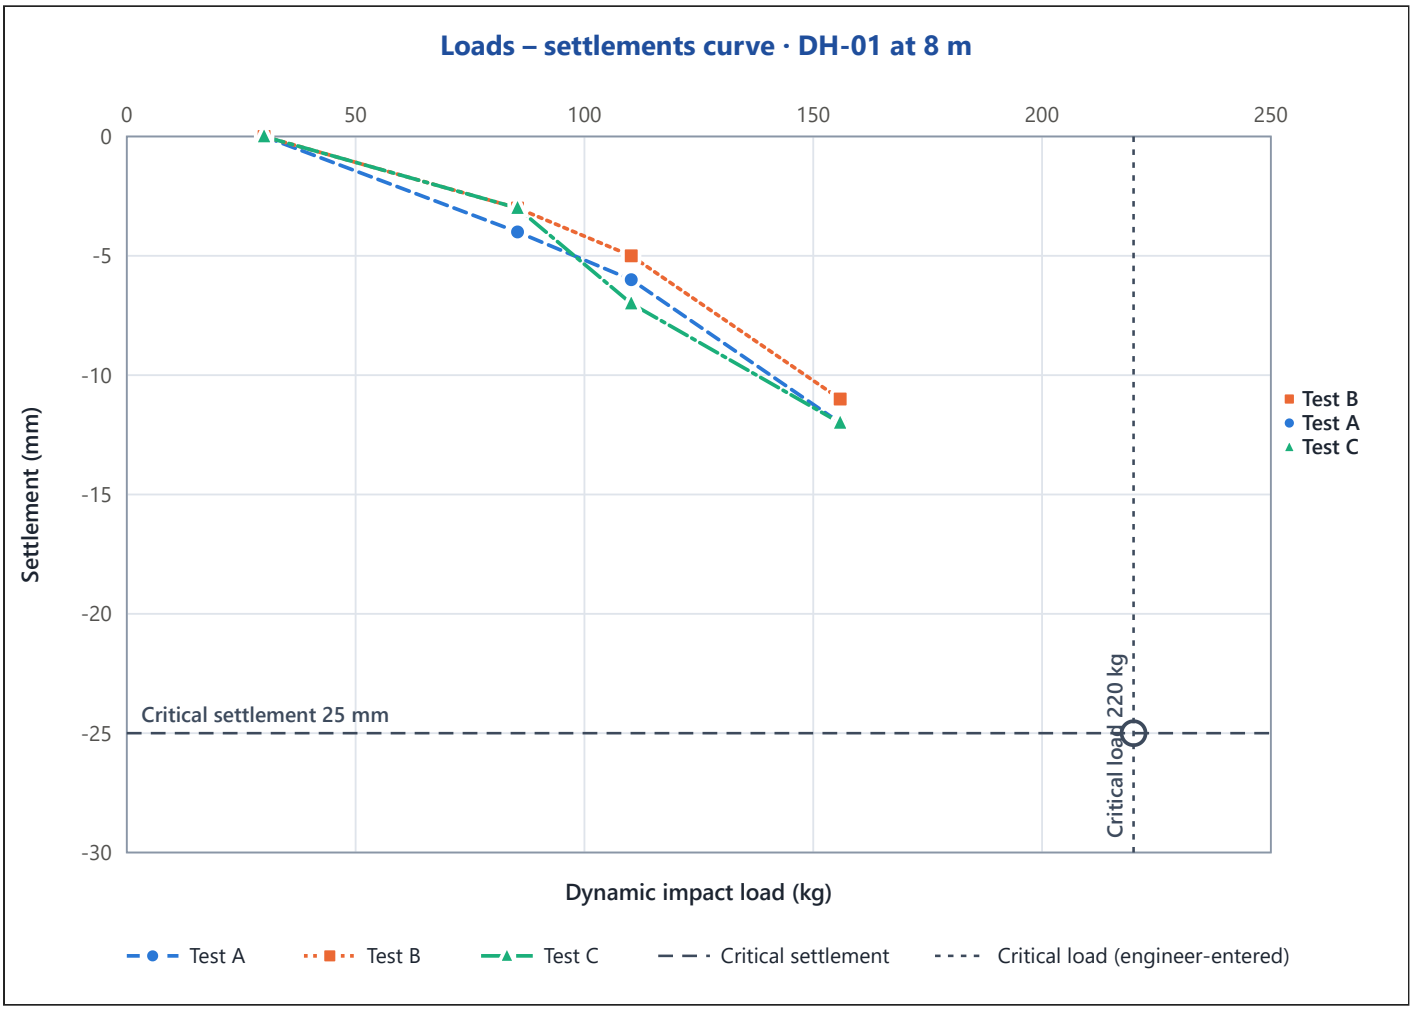

Method: YAZE-ADCPT 1.0, approved by Engr. Sample Engineer (PRC 0000000) on 09 OCTOBER 2026. Critical loads are the engineer's determination per depth; ASBC = USBC / SF.

ADVANCED DYNAMIC CONE PENETRATION TEST (ADCPT)


PROJECT TITLE :	**PROPOSED THREE (3) STOREY COMMERCIAL BUILDING**		
LOCATION :	**SAMPLE BARANGAY, SAMPLE CITY, PALAWAN**		
TEST NO. :	**DRILLHOLE - 01 (DH-01)**	DATE TESTED :	**03 OCTOBER 2026**
WEATHER :	**FAIR / SUNNY**	TIME TESTED :	**9:00 AM**

DYNAMIC LOADS – SETTLEMENTS ANALYSIS

DRILLHOLE DEPTH: 9 m **UNIFIED SOIL CLASSIFICATION (USCS):** Lithified clay (R0) — soft shale / claystone

DROP h (mm)	DH MASS (kg)	PENETRATION READING (mm)			IMPACT LOAD (kg)	SETTLEMENT (mm)		
		TEST A	TEST B	TEST C		TEST A	TEST B	TEST C
0	30	500			30	0	0	0
300	30	497	480	464	85.38	−3	−2	−3
500	30	492	476	459	110.23	−5	−4	−5
1000	30	482	467	450	155.88	−10	−9	−9
CRITICAL LOAD @ CRITICAL SETTLEMENT					**240.00**	**−25**		

DYNAMIC LOADS – SETTLEMENTS CURVE

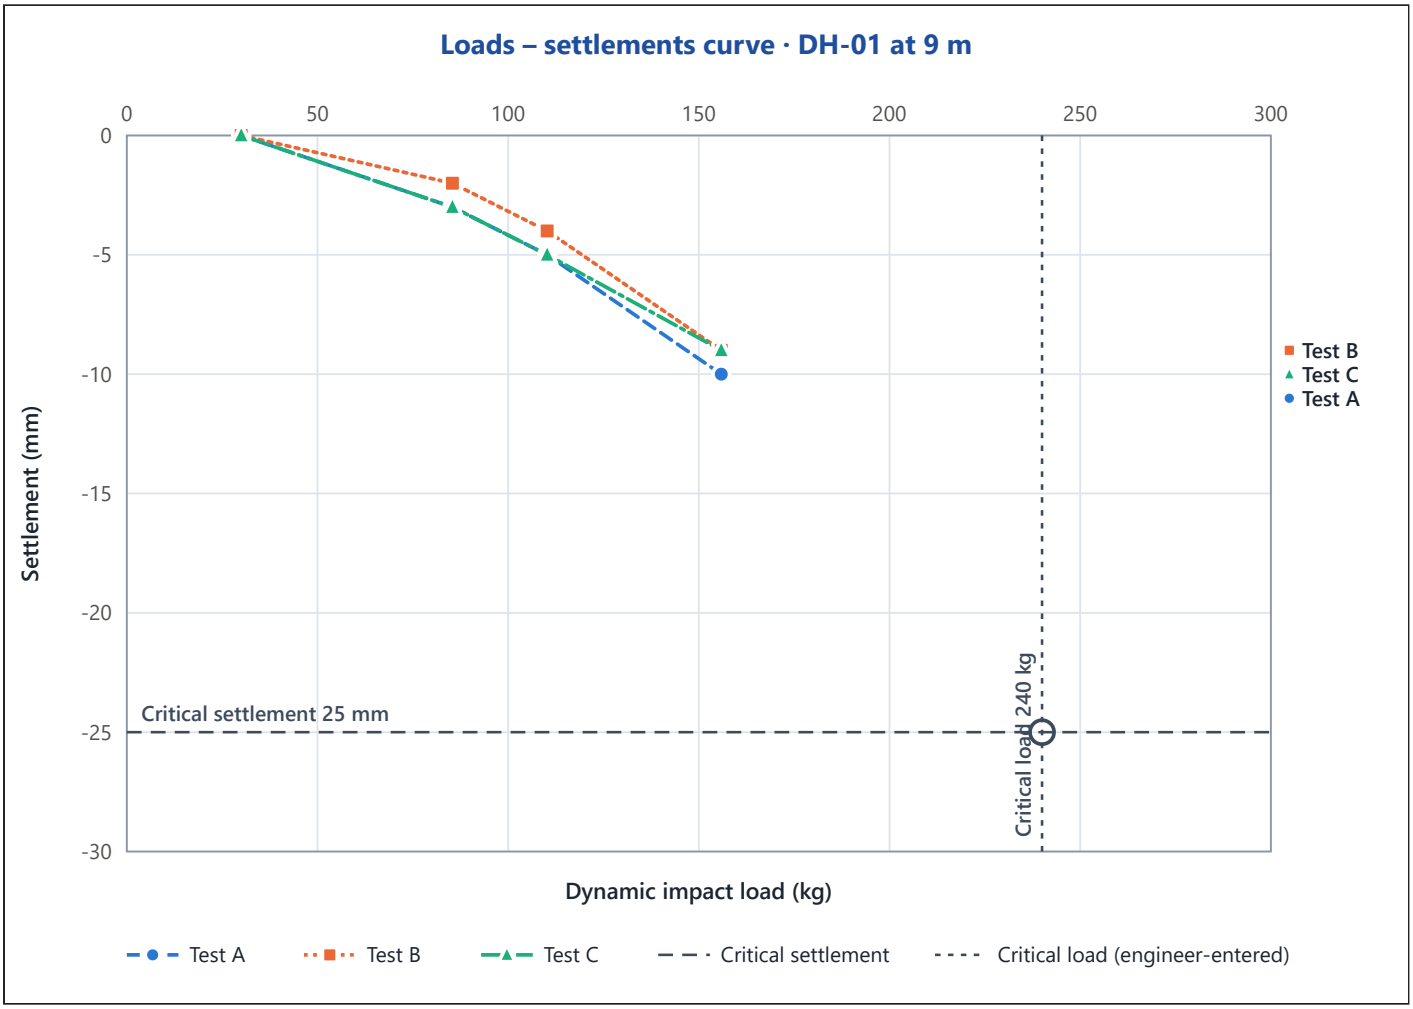

Method: YAZE-ADCPT 1.0, approved by Engr. Sample Engineer (PRC 0000000) on 09 OCTOBER 2026. Critical loads are the engineer's determination per depth; ASBC = USBC / SF.

ADVANCED DYNAMIC CONE PENETRATION TEST (ADCPT)


PROJECT TITLE :	**PROPOSED THREE (3) STOREY COMMERCIAL BUILDING**		
LOCATION :	**SAMPLE BARANGAY, SAMPLE CITY, PALAWAN**		
TEST NO. :	**DRILLHOLE - 01 (DH-01)**	DATE TESTED :	**03 OCTOBER 2026**
WEATHER :	**FAIR / SUNNY**	TIME TESTED :	**9:00 AM**

DYNAMIC LOADS – SETTLEMENTS ANALYSIS

DRILLHOLE DEPTH: 10 m **UNIFIED SOIL CLASSIFICATION (USCS):** Lithified clay (R0) — soft shale / claystone

DROP h (mm)	DH MASS (kg)	PENETRATION READING (mm)			IMPACT LOAD (kg)	SETTLEMENT (mm)		
		TEST A	TEST B	TEST C		TEST A	TEST B	TEST C
0	30	500			30	0	0	0
300	30	498	483	468	85.38	−2	−2	−3
500	30	493	479	463	110.23	−5	−4	−5
1000	30	485	471	456	155.88	−8	−8	−7
CRITICAL LOAD @ CRITICAL SETTLEMENT					**297.00**	**−25**		

DYNAMIC LOADS – SETTLEMENTS CURVE

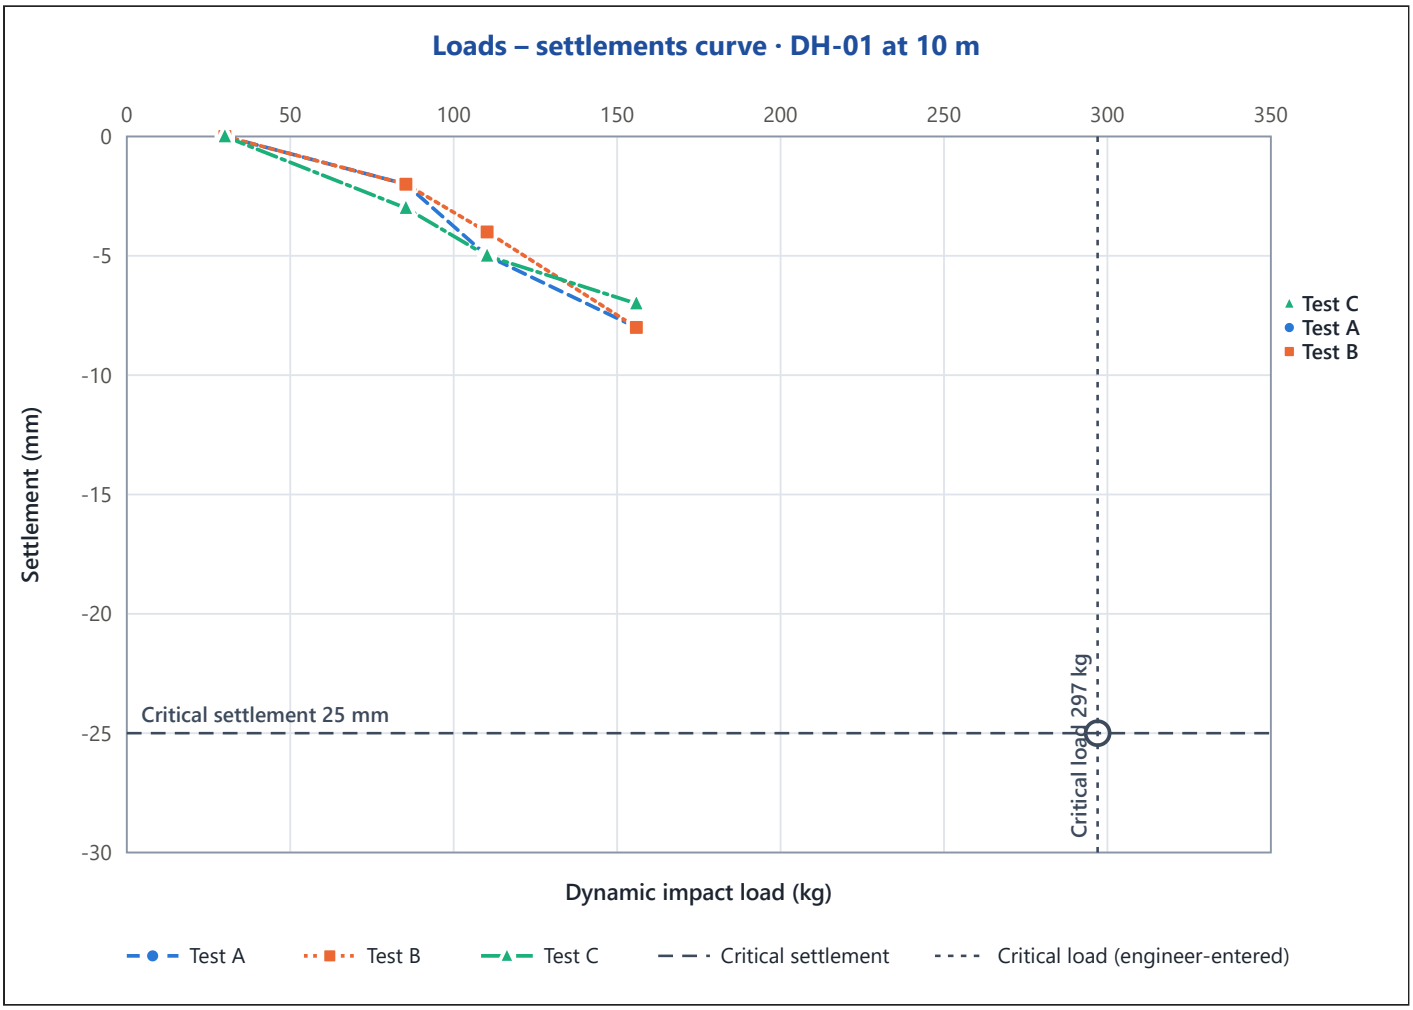

Method: YAZE-ADCPT 1.0, approved by Engr. Sample Engineer (PRC 0000000) on 09 OCTOBER 2026. Critical loads are the engineer's determination per depth; ASBC = USBC / SF.

ADVANCED DYNAMIC CONE PENETRATION TEST REPORT

PROJECT TITLE :	**PROPOSED THREE (3) STOREY COMMERCIAL BUILDING**		
LOCATION :	**SAMPLE BARANGAY, SAMPLE CITY, PALAWAN**		
TEST NO. :	**DRILLHOLE - 01 (DH-01)**	DATE TESTED :	**03 OCTOBER 2026**
WEATHER :	**FAIR / SUNNY**	TIME TESTED :	**9:00 AM**

DCPT BOREHOLE DEPTH – ASBC CURVE


DROP HAMMER MASS (M): 30 kg **IMPACT LOAD (I):** $M \times (27 \times H)^{0.5}$, H in m **SF:** 3

DCPT borehole depth – ASBC curve · DH-01

Soil description

CL — Lean clay, yellowish-brown to creamy-yellowish white
Stiff to very stiff clay

Lithified clay (R0) — soft shale / claystone
Extremely weak rock

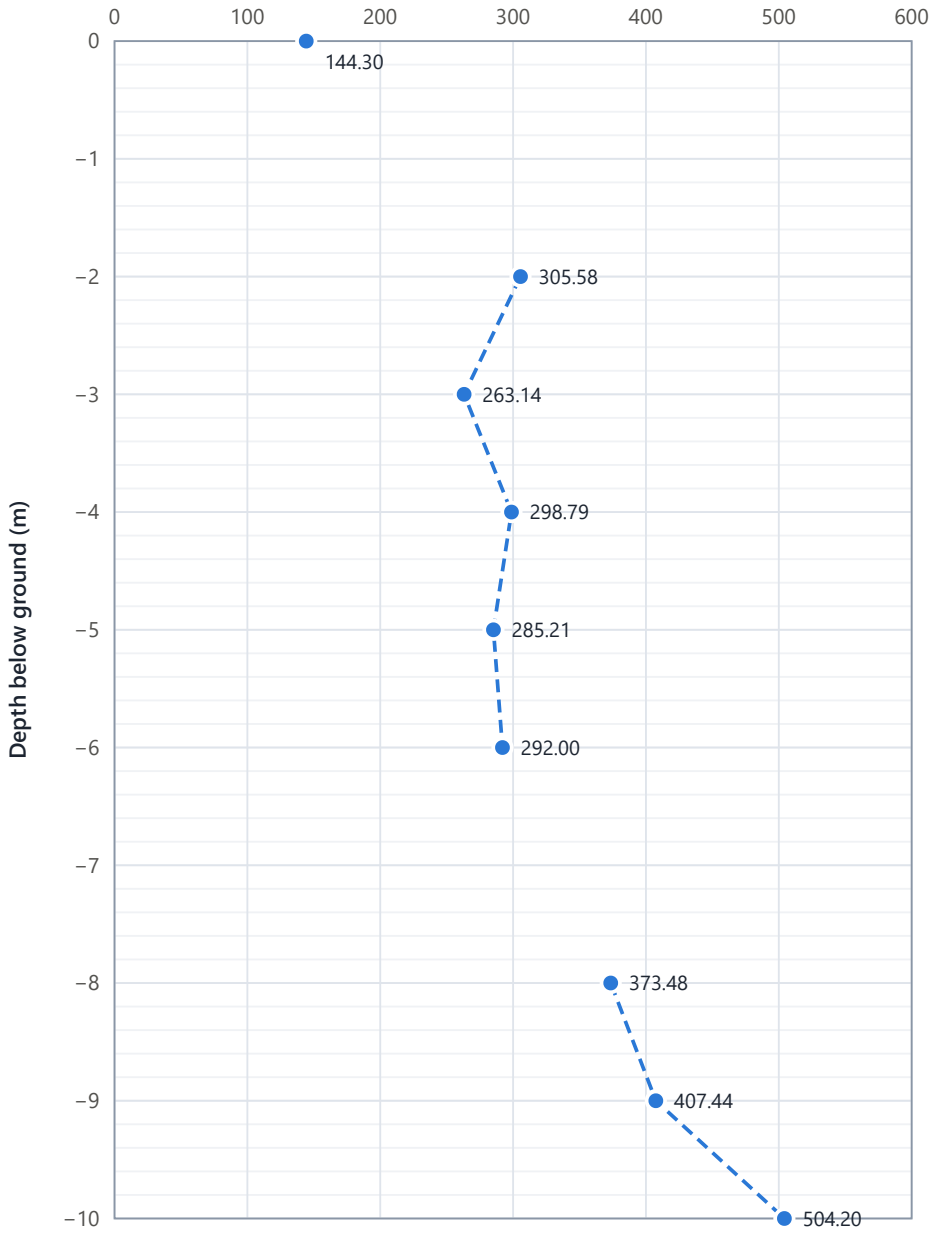

ASBC = USBC / SF from engineer-entered critical loads. 9 of 11 depth(s) plotted.
Not plotted (no critical load): 1, 7

Method: YAZE-ADCPT 1.0, approved by Engr. Sample Engineer (PRC 0000000) on 09 OCTOBER 2026. Critical loads are the engineer's determination per depth; ASBC = USBC / SF.

ADVANCED DYNAMIC CONE PENETRATION TEST REPORT

PROJECT TITLE :	**PROPOSED THREE (3) STOREY COMMERCIAL BUILDING**		
LOCATION :	**SAMPLE BARANGAY, SAMPLE CITY, PALAWAN**		
TEST NO. :	**DRILLHOLE - 01 (DH-01)**	DATE TESTED :	**03 OCTOBER 2026**
WEATHER :	**FAIR / SUNNY**	TIME TESTED :	**9:00 AM**

SOIL PROFILE / DESCRIPTION

FROM (m)	TO (m)	USCS	MATERIAL DESCRIPTION / CONSISTENCY	NOTES	LAB REFERENCES
0	8.8	**CL**	Lean clay, yellowish-brown to creamy-yellowish white *Stiff to very stiff clay*		
8.8	10	**—**	Lithified clay (R0) — soft shale / claystone *Extremely weak rock*		

Soil descriptions and classifications are assigned by the engineer; they are not derived from penetration resistance.

ADVANCED DYNAMIC PENETRATION TEST

PROJECT TITLE :	**PROPOSED THREE (3) STOREY COMMERCIAL BUILDING**		
LOCATION :	**SAMPLE BARANGAY, SAMPLE CITY, PALAWAN**		
TEST NO. :	**DRILLHOLE - 01 (DH-01)**	DATE TESTED :	**03 OCTOBER 2026**
WEATHER :	**FAIR / SUNNY**	TIME TESTED :	**9:00 AM**

SOIL DATA SHEET — FIELD MEASUREMENTS

DEPTH (m)	HEIGHT OF DROP (mm)	HAMMER (kg)	PENETRATION TRIAL READING (mm)				NUMBER OF BLOWS	
			INITIAL	TEST A	TEST B	TEST C	Δ (mm)	N
NEAR NGL	300	30	**500**	475	377	320	**130 mm**	**2**
	500	30		480	355	301		
	700	30		395	328	270		
1	300	30	**500**	484	410	346	**200 mm**	**5**
	500	30		460	390	330		
	1,000	30		421	355	305		
2	300	30	**500**	492	460	430	**67 mm**	**5**
	500	30		482	450	420		
	1,000	30		463	435	403		
3	300	30	**500**	499	465	428	**111 mm**	**5**
	500	30		495	455	412		
	1,000	30		470	435	391		
4	300	30	**500**	497	465	435	**70 mm**	**5**
	500	30		490	455	425		
	1,000	30		471	440	405		
5	300	30	**500**	496	465	437	**79 mm**	**5**
	500	30		490	455	425		
	1,000	30		470	440	405		
6	300	30	**500**	495	460	426	**87 mm**	**5**
	500	30		485	450	420		
	1,000	30		465	429	405		
7	300	30	**500**	496	472	454	**57 mm**	**5**
	500	30		489	467	449		
	1,000	30		475	457	438		
8	300	30	**500**	496	475	456	**53 mm**	**5**
	500	30		490	470	449		
	1,000	30		478	459	437		
9	300	30	**500**	497	480	464	**46 mm**	**5**
	500	30		492	476	459		
	1,000	30		482	467	450		
10	300	30	**500**	498	483	468	**37 mm**	**5**
	500	30		493	479	463		
	1,000	30		485	471	456		

CONDUCTED BY: Field Technician **TIME STARTED:** 9:00 AM **TIME COMPLETED:** 12:00 PM

REFERENCES: NSCP 2015 7th Edition; ASTM D6951/D6951M; ASTM D3441